

**Contact Info :**

Name: Lawson

Email: Jenlightinginc@gmail.com


Office : (917) 781-2338

Business Cell: (631) 905-5690

Web: www.JenLighting.com

LED Linear High Bay

Spec Sheet

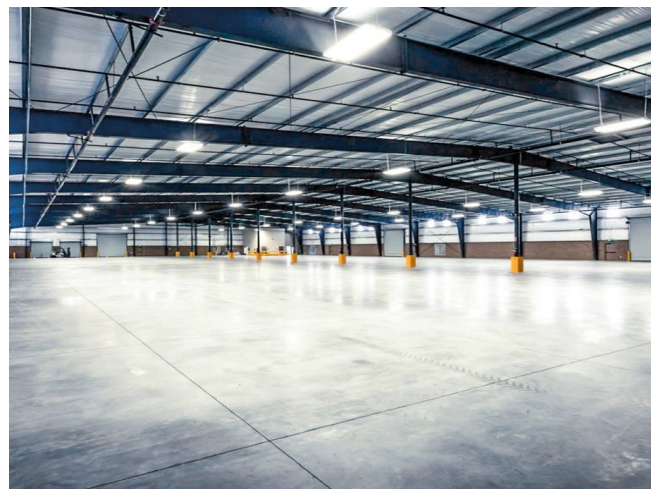**Applications:**

Industrial; warehouse; supermarket; factory and other high ceiling application..



FEATURES

Ideal replacement for HID warehouse lighting

Steel housing with white powder-coated finish

Drivers come standard with 1-10V dimming leads capable of variable dimming down to 10%.

Semi-diffuse acrylic lens to cover the emitters and reflectors

Chain, pendant or V hook mounting

APPLICATIONS

Industrial; warehouse; supermarket; factory and other high ceiling application...

PRODUCT SPECIFICATION


SPECIFICATIONS

Volts: 120-277VAC**Power Factor:** >0.9**THD:** <20%**Average Rated Life:** 50,000**Driver Efficiency:** >87%**CCT:** 5000K**Ambient temp:** -4°F to 110°F

SKU	Model No.	Watt	Lumens	DLC ID
JEN-LHB-2FT100W- 5000K	HG -L225A/DM- XE -5000K	100W	13000 lm	P1DWFAWS
JEN-LHB-4FT160W- 5000K	HG -L225A/DM- XXS -5000K	160W	17600 lm	PK7P33SH



LED Linear High Bay

DIMENSION

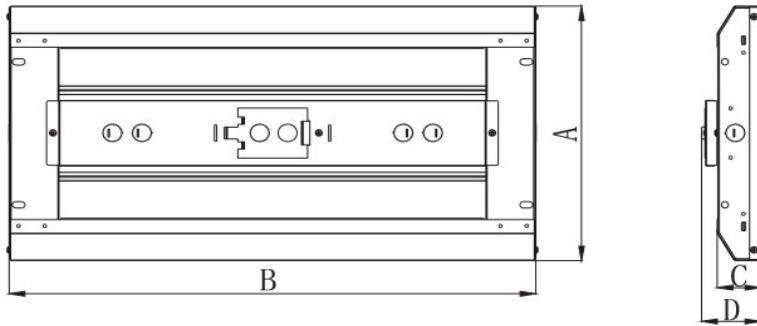


Dimension	100W-2FT	160W-4F
Dimension A	12.6"	12.6"
Dimension B	23.82"	45.87"
Dimension D	2.07"	2.07"


LIGHT DISTRIBUTION

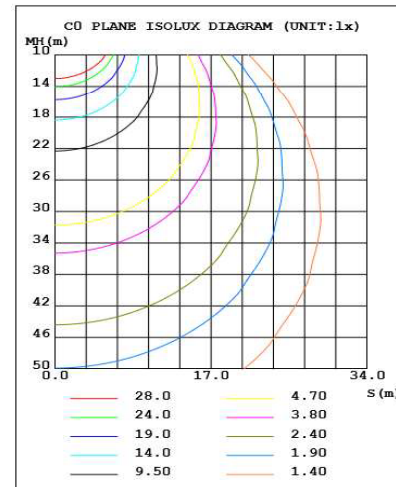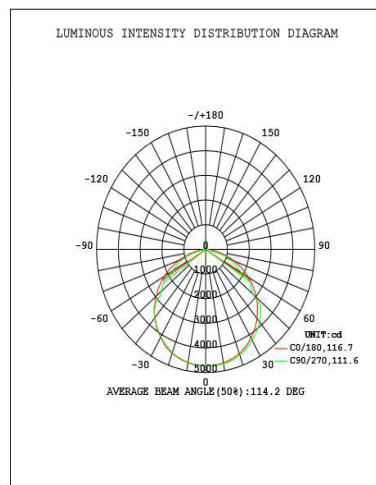


INSTALLATION GUIDE

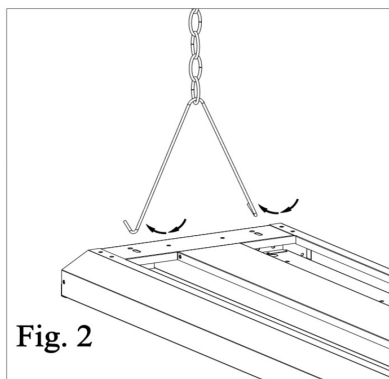

1-Hook the V-hook with chain on the high bay

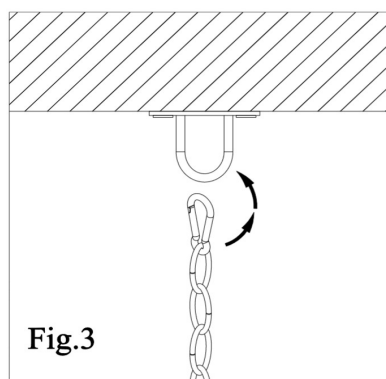

2-Hook up the chain on the ceiling anchor

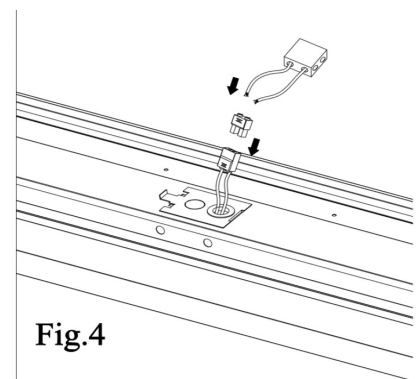

3-Turn off the power,make the wire connection to the quick connector

