

LED UFO High Bay Fixture

SPEC SHEET



Industrial application:
Warehouse, Factory etc.

GENERAL DESCRIPTION

UFO High Bay LED luminaries are slim, sleek and lightweight for easy install, and suitable for up to 30 foot mounting heights. The UFO delivers efficient and uniform light. The luminaire offers a 50K hour life rating and is suitable for elevated ambient temperatures. Perfect for warehouses, gymnasiums, production assembly areas, and any high ceiling applications.

FEATURES

- Built-in cooling fins provide maximum heat dissipation for higher ambient temperatures
- Die cast hook mount standard for ease of installation
- 1/2" threaded hub for pendant mount applications
- Impact resistant glass lens
- Includes 6-foot power & dimming cord with leads
- Wet location rated IP65

APPLICATIONS

Suitable for wet location
Warehouse and industrial lighting



SPECIFICATIONS

Volts: 120-277VAC

Power Factor: >0.9

THD: <20%

Average Rated Life: 50,000 Beam

Angle: 110°

CRI: >80

CCT: 5000K

Color: Black

Ambient temp: -40°F to 140°F

LED UFO High Bay Fixture

SPECIFICATIONS


Model No.	Power	Lumens	Lumen Efficiency	CCT	Dimmable	Mounting Height	Voltage	Qty per Case
JEN-UFO12-100W-110- H	100w	13,000	130LM/W	4000K/5000K	0-10v	15' to 20'	AC100-277V	1
JEN-UFO24-150W-110- H	150w	19,500	130LM/W	4000K/5000K	0-10v	20' to 25'	AC100-277V	1
JEN-UFO24-200W-110- H	200w	26,000	130LM/W	4000K/5000K	0-10v	25' to 30'	AC100-277V	1

Dimensions


100W/150W: 11.9" Dia. x 2.68" Depth
 200W: 14.9" Dia. x 2.99" Depth

Weight


100W and 150W: 9.2 lbs
 200W: 14.3 lbs

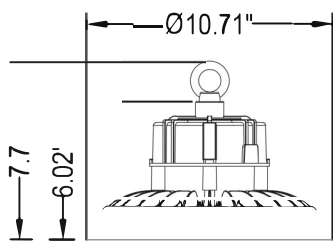

100W

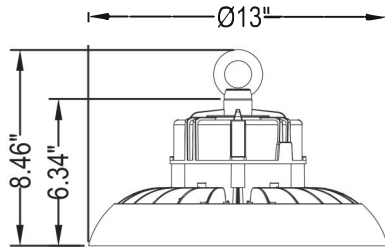


150W

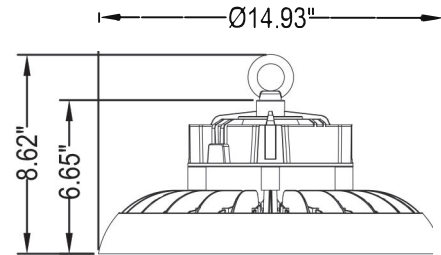

200W

DIMMER CONNECTION

- Compatible with 0-10V dimming.
- Connect wires as below, purple wire is D +, gray wire is D -, cap black wire.

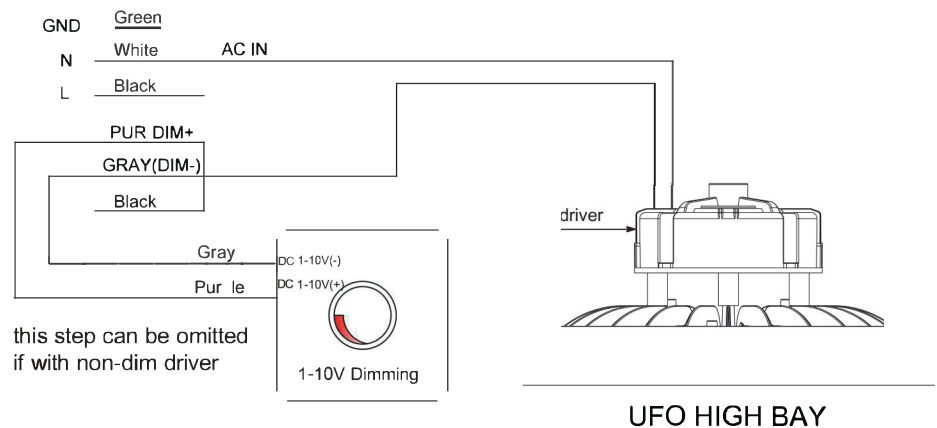

MOUNTING HEIGHT & EQUIVALENCE

